



Low Clearance Hydraulic Torque Wrench

SXD
SERIES

- Versatile, Accurate, Durable, Dependable
- +/- 3% Accuracy
- Nickel Plated for Corrosion Resistance
- Multi Position Safety Swivel
- Smallest Design, Fit Friendly
- Threaded or Quick Connect Couplers
- Finest Aircraft Materials Available
- 2 Year Warranty




www.RoarkTools.com

Ph: 1 (973) 685-6918

Fax: 1 (973) 685-4059

info@roarktools.com

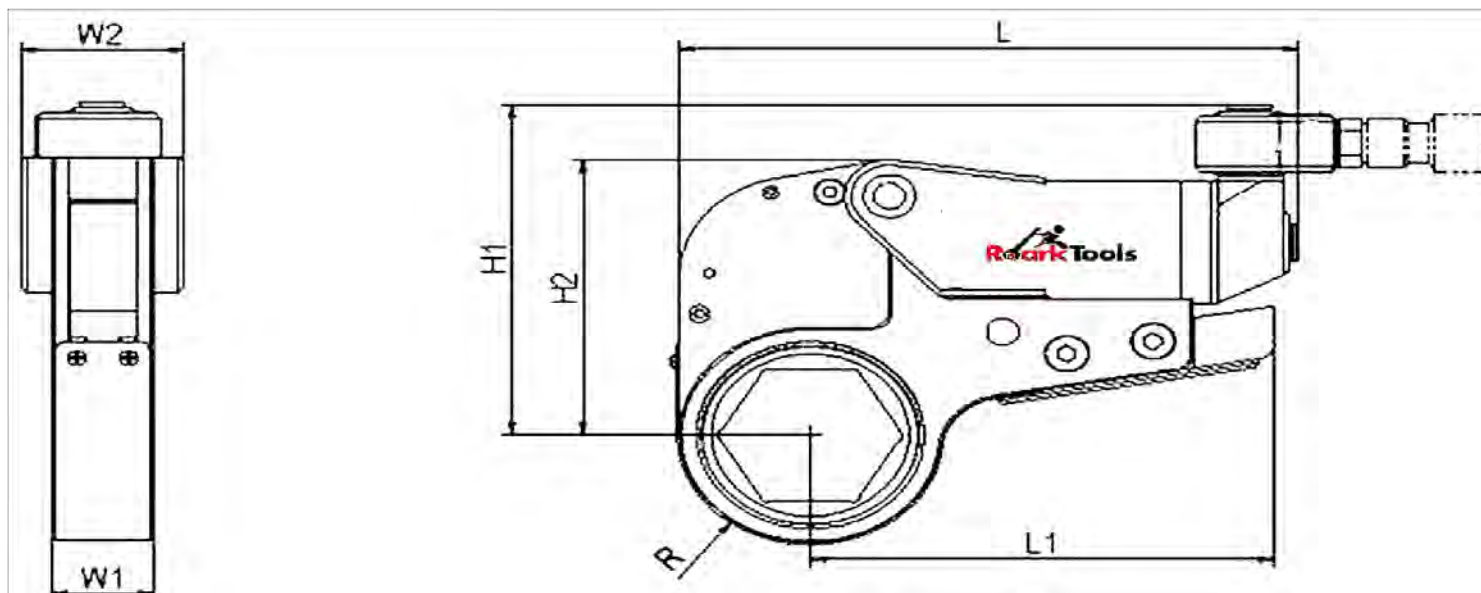

SXD Technical Information:

Model No	SXD-2	SXD-4	SXD-8	SXD-14	SXD-16	SXD-32
Min. Torque ft-lbs (Nm)	167(227)	383(519)	727(986)	1,268(1,720)	1,702(2,307)	2,997(4,064)
Max. Torque ft-lbs (Nm)	1,671(2266)	3,826(5188)	7,269(9855)	12,688(17,202)	17,017(23,072)	29,974(40,639)
Output Accuracy	± 3%	± 3%	± 3%	± 3%	± 3%	± 3%
Repeatability	100%	100%	100%	100%	100%	100%
Duty Cycle	100%	100%	100%	100%	100%	100%
Tool Weight Lbs (Kg)	5(2.2)	11(5)	21.2(9.6)	37.5(16.9)	50.7(22.9)	83.1(38)
L Inches (mm)	8.07(205)	9.89(251.3)	11.91(302.5)	14.45(367)	15.77(400.5)	18.01(457.5)
L1 Inches (mm)	5.79(147)	7.40(188)	9.17(233)	11.14(283)	12.12(308)	14.33(364)
H1 Inches (mm)	5.08(129)	6.42(163)	7.52(191)	8.78(223)	9.68(246)	11.10(282)
H2 Inches (mm)	3.94(100)	5.35(136)	6.55(166.5)	7.79(198)	8.82(224)	10.43(265)
W1 Inches (mm)	1.26(32)	1.61(41)	2.09(53)	2.52(64)	2.75(70)	3.31(84)
W2 Inches (mm)	1.97(50)	2.60(66)	3.27(83)	3.90(99)	4.33(110)	5.20(132)
R Inches (mm)	1.63(41.3)	2.12(53.8)	2.71(68.8)	3.36(85.3)	3.89(98.8)	4.56(115.8)
Common Hex Size Inches (mm)	1 1/16"-2"(27-50)	1 1/16"-2 9/16"(27-65)	2"-3 5/8"(50-90)	3 5/16"- 4 9/16"(85-115)	3 5/8"-5 5/16"(95-135)	3 15/16"-6 1/8"(100-155)