



Square Drive Hydraulic Torque Wrench

SSD
SERIES




- Powerful, Accurate, Durable, Dependable
- +/- 3% Accuracy
- Most Fit Friendly
- Enclosed Housing
- Easy to Repair
- Threaded or Quick Connect Couplers
- Finite Element Analysis- Longer Tool Life
- Finest Aircraft Grade Materials Available
- 2 Year Warranty

www.RoarkTools.com

Ph: 1 (973) 685-6918

Fax: 1 (973) 685-4059

info@roarktools.com

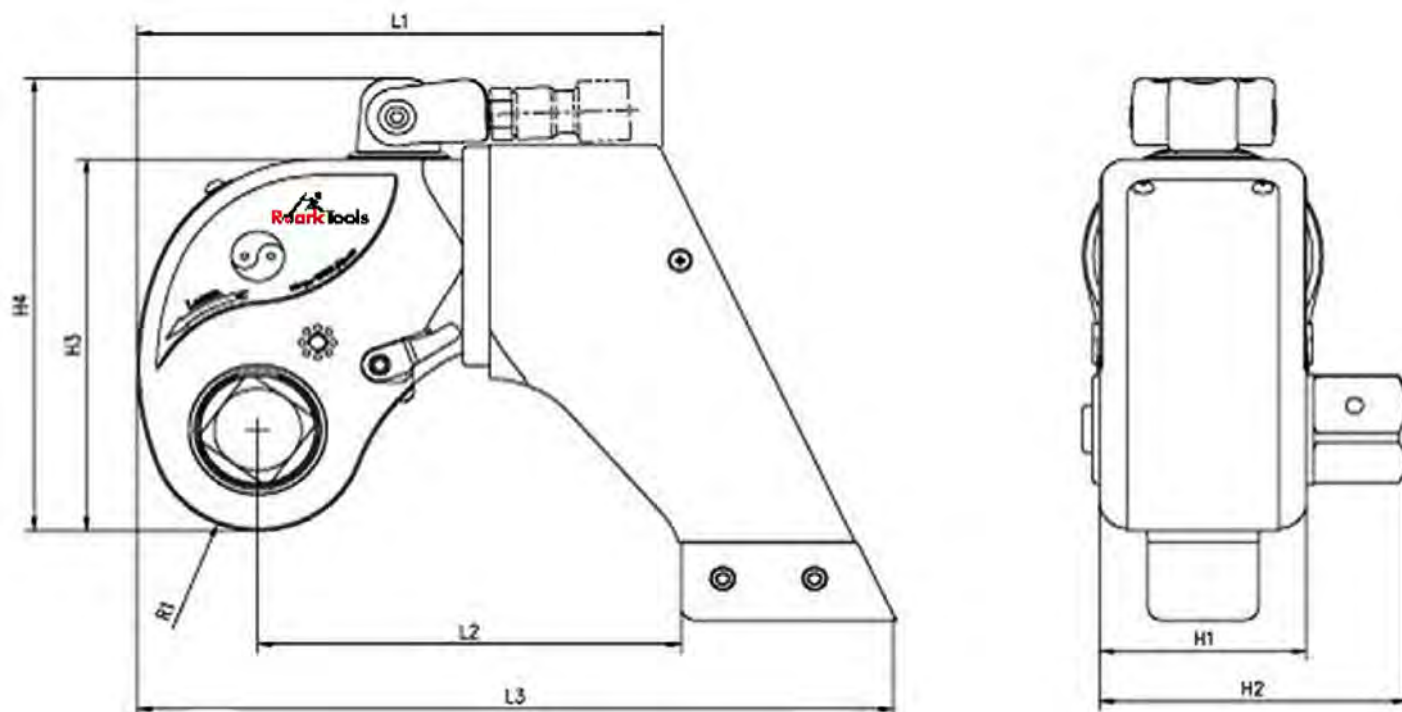

SSD Technical Information:

Model No	SSD-2	SSD-3	SSD-5	SSD-7	SSD-11	SSD-20	SSD-27	SSD-35	SSD-50
Square Drive	3/4"	1"	1 1/2"	1 1/2"	1 1/2"	2 1/2"	2 1/2"	2 1/2"	2 1/2"
Min. Torque ft-lbs (Nm)	139(188)	330(447)	550(745)	791(1073)	1,133(1,536)	1,946(2639)	2,610(3,540)	3,595(4,874)	5,212(7,066)
Max. Torque ft-lbs (Nm)	1,388(1,882)	3,294(4,466)	5,495(7,451)	7,915(10,732)	11,328(15,359)	19,465(26,392)	26,107(35,397)	35,948(48,740)	52,166(70,660)
Output Accuracy	+/- 3%	+/- 3%	+/- 3%	+/- 3%	+/- 3%	+/- 3%	+/- 3%	+/- 3%	+/- 3%
Repeatability	100%	100%	100%	100%	100%	100%	100%	100%	100%
Duty Cycle	100%	100%	100%	100%	100%	100%	100%	100%	100%
Tool Weight Lbs (Kg)	4.7(2)	9(4)	16(7)	23.5(10.6)	29(12.9)	55(25)	75(33.8)	94(43)	115(52)
L1 Inches (mm)	5.12(130)	6.70(170)	7.95(202)	0.90(228)	9.33(237)	11.30(287)	12.72(323)	13.82(351)	14.80(376)
L2 Inches (mm)	4.02(102)	5.51(140)	6.30(160)	7.24(184)	7.56(192)	9.76(248)	10.08(256)	10.67(271)	11.61(295)
L3 Inches (mm)	7.17(182)	9.80(249)	11.26(286)	12.83(326)	13.23(336)	17.05(433)	18.27(464)	19.45(494)	20.79(528)
H1 Inches (mm)	2.05(52)	2.76(70)	3.19(81)	3.54(90)	3.94(100)	4.72(120)	5.43(138)	6.02(153)	6.38(162)
H2 Inches (mm)	3.03(77)	3.86(98)	4.92(125)	5.28(134)	5.67(144)	7.36(187)	8.11(206)	8.54(217)	8.90(226)
H3 Inches (mm)	3.78(96)	5(127)	5.87(149)	6.77(172)	7.13(181)	8.70(221)	10.16(258)	10.98(279)	11.46(291)
H4 Inches (mm)	5.24(133)	6.5(165)	7.24(184)	8.15(207)	8.50(216)	10.08(256)	9.09(231)	12.40(315)	12.83(326)
R Inches (mm)	1.02(25.8)	1.37(34.8)	1.57(39.8)	1.84(46.8)	2(50.8)	2.35(59.8)	2.79(70.8)	3.02(76.8)	3.10(78.8)